


Dual ViaSat Housing DTD-D250 Rugged Rack Mount Enclosure



- Holds two ViaSat KG-250* IP Bulk Encryptors
- Single connector AC and DC power versions
- Dual Thermal Fuses
- Separate On/Off Circuit breakers for each KG250
- 1.5 U rack mount with adjustable rear brackets
- RJ 45 or Mil Circular connectors*
- Blank out panel for single device applications
- Customer specified interface

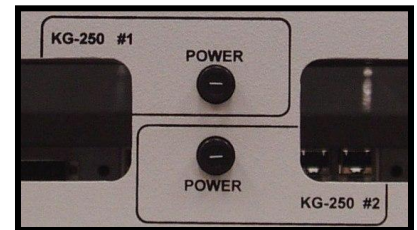

On/Off Individual Circuit Breakers

*Please call for configuration

National Stock Numbers:

5975-01-585-8265 (DTD-D250-AAA)

5975-01-585-8295 (DTD-D250-BBB-4)

Power:

- 110 – 260 VAC, 50-60, 400Hz
- 28 VDC

Operating Temperature Range:

-30° to 60° C

Physical Characteristics:

- 2.625"H x 17.5"W X 18.0"D (22" D for fiber versions)
- 9.8 lbs (without crypto)

Warranty is 24 months, parts and labor



**Can also be used for xPEP and HAF100*